



DCHV MP

HV-HV reversible Buck or Boost Converter
 Voltage up to 950V_{DC}, current 480A
 Power 250kW at 500V Side A
 Multi inputs / outputs capability
 Cutting-edge power density

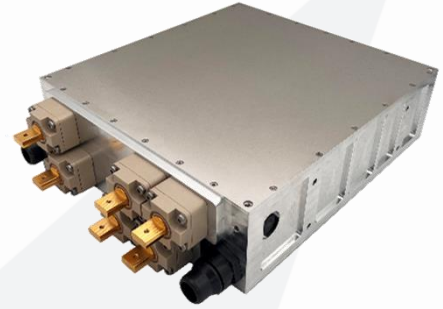

KEY FEATURES

- > Built-in magnetics, inductors and transformers included
- > Input and output range : 0 to 950V_{DC}
- > Non-overlapping topology : $V_{SideB} > V_{sideA}$
- > Bi-directional current operation possible
- > Max current : 480A
- > Current and voltage control
- > CAN remote communication and monitoring
- > Weight: 10,5kg
- > Can be paralleled for increased power
- > Buck-boost option available for overlapping input-output voltage
- > Up to 8 ports possible for multiple inputs-outputs configurations
- > Connectors and Busbars options for electrical interface

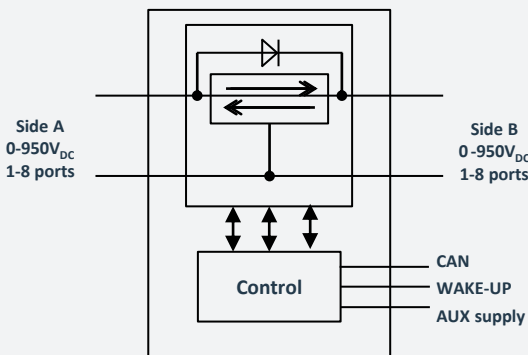

TECHNICAL SPECIFICATION

Power	
Max number of ports	8 side A, 8 side B
Side A and side B voltage range	0V to 950V _{DC}
Voltage settings possibilities	Max boost ratio : $V_B = 20 \times V_A$ max Bypass mode : $V_A = V_B$ possible Short-circuit mode : $V_A = 0V$
Voltage accuracy	+/-1% of full scale
Current capability	+/-60A per channel, +/-480A total
Current accuracy	<3% of full scale
Efficiency	98.9% at nominal current with 2:1voltage conversion ratio
Short circuit protection	Current regulation at setpoint value down to 0V (in case the side A is regulated in voltage mode)
X Capacitance	100µF per side A & B No inrush current limitation
Y Capacitance	1µF
Safety discharge time	<5sec to reach 60V
Control	
Auxiliary supply	9V _{DC} - 60V _{DC} <100µA disable mode current consumption <40W in Power_ON mode
Enable function	ON/OFF signal. Tie to ground for start-up. Internal pull up
Inrush current limitation	Not included
Environment	
Environmental protection	IP67
Altitude	Up to 4000m
Max cooling temperature	65°C outlet
Operating temperature range	From -40°C to 70°C ambient
Storage temperature range	From -40°C to 100°C
Dielectric withstand	
HV - case isolation	1950 V _{DC} Basic isolation
HV - LV isolation	2500 V _{DC} Reinforced isolation

BrightLoop Converters

221 Boulevard Davout
 75020 Paris – France
 Tel +33 1 83 62 63 59

www.brightloop.fr




DCHV MP

TECHNICAL SPECIFICATION

CAN Interface	
Bus speed	125Kbps to 1Mbps (set by CAN)
Controls	Side A Current limit +/-480A , 2A resolution
	Side A Voltage set point 0V to 950V 1V resolution
	Side B Current limit +/-480A, 2A resolution
	Side B Voltage set point 0V to 950V, 1V resolution
Monitoring	Power ON/OFF
	Discharge request
	DC/DC Status
	Voltages and currents
	Internal auxiliary power supplies voltage
Identification	Internal protections
	Software & Hardware revision
Software Update	CAN Bootloader
Liquid cooling	
Pressure loss	<200mBar TBC
Maximum recommended operating pressure	1.3bar TBC
Maximum testing pressure	2.6 bar TBC
Hydraulic connector	NORMAQUICK PS3 VDA (Mounted on NORMAQUICK PS3 NW 16-xx)
Mechanical	
Dimensions	260 x 280 x 80mm + connectors
Weight	10,5kg
Interface	M8 fixations on each sides
Housing	Aluminum with conductive anti-corrosion treatment
Power connectors options	Amphenol PL300 with HVIL
	Amphenol PL082 with HVIL
Signals connector	Bus bar connection
	8STA family (SOURIAU)

OUTLINE DRAWING

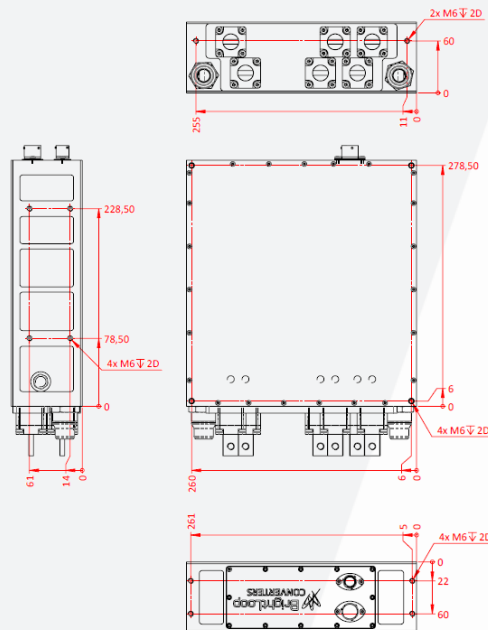

Dimensions in mm

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59


www.brightloop.fr



Ordering code logic

Port examples
Individually CAN settable

- Fuel Cell #1
- Fuel Cell #2
- Compressor inverter
- 400V_{DC} auxiliaries

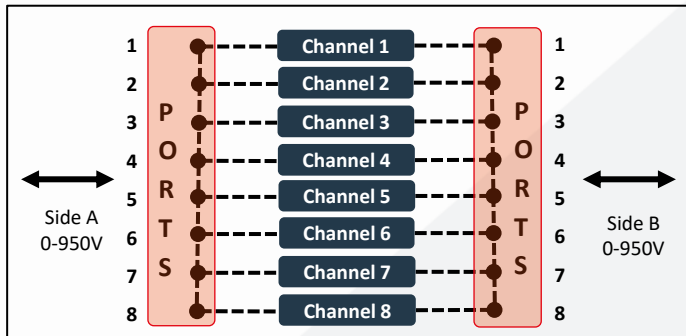

Port examples
Individually CAN settable

- HV battery
- Ultracapacitors
- Trolley

DCHV MP – 480A 60A per channel

--- Reversible PowerPaths
 Ports configuration stage

Part number example :



1 - Product family		2 - Voltage	
DC	HV-HV non-isolated DCDC converter	HV	950V _{DC} max
3 - Package size		4 - Product line	
M	Medium	P	Performance
5 - Number of ports on side A		6 - Number of ports on side B	
S	Single	S	Single
D	Dual	D	Dual
T	Triple	T	Triple
Q	Quadruple	Q	Quadruple
P	Penta	P	Penta
Sx	Six	H	Six
H	Hepta (seven)	He	Hepta (seven)
O	Octo (eight)	O	Octo (eight)
8 - Cooling option			
LC	Liquid cooling		
FA	Forced air		

V22.04

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

