


DCVHV LP

In development

HV-HV bidirectional Buck or Boost Converter
Voltage up to 1800V_{DC}, current 400A
Power 500kW at 1250V_{DC} Side A
Multi inputs / outputs capability
Cutting-edge power density

KEY FEATURES

- > Built-in capacitors & inductors
- > Input and output range: 0 to 1800V_{DC}
- > Non-overlapping topology: $V_{\text{sideB}} > V_{\text{sideA}}$
- > Bidirectional current capability
- > Max current: 400A
- > Current and voltage control
- > CAN remote communication and monitoring
- > Weight: TBC
- > Can be paralleled for increased power
- > Up to 4 ports possible for multiple inputs-outputs configurations
- > Connectors and Busbars options for electrical interface

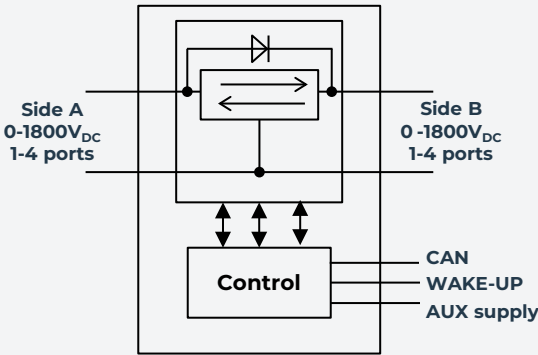

TECHNICAL SPECIFICATION

Power	
Max number of ports	4 side A, 4 side B
Side A and side B voltage range	0V _{DC} to 1800V _{DC}
Voltage settings possibilities	Max boost ratio: $V_B = 20 \times V_A$ max Short-circuit operation: $V_A = 0V_{DC}$
Voltage accuracy	+/-1% of full scale
Current capability	+/-50A per channel, +/-400A total
Current accuracy	<3% of full scale
Efficiency	98.9% at nominal current with 2:1 voltage conversion ratio
Short circuit protection	Current regulation at setpoint value down to 0V _{DC} (in case the side A is regulated in voltage mode)
X Capacitance	11μF per side A & B No inrush current limitation
Y Capacitance	<0.2μF
Safety discharge time	<5 sec to reach 60V
Control	
Auxiliary supply	9V _{DC} – 60V _{DC} <100μA disable mode current consumption <100W in Power_ON
Enable function	ON/OFF signal. Tie to ground for start-up. Internal pull up
Inrush current limitation	Not included
Environment	
Environmental protection	IP67
Altitude	Up to 4000m
Max cooling temperature	65°C outlet
Operating temperature range	From -40°C to 70°C ambient
Storage temperature range	From -40°C to 100°C
Dielectric withstand	
HV - case isolation	4300V _{DC} Basic isolation
HV - LV isolation	5300V _{DC} Reinforced isolation

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

DCVHV LP

TECHNICAL SPECIFICATION

CAN interface	
Bus speed	125Kbps to 1Mbps (set by CAN)
Controls	Side A Current limit +/-400A , 2A resolution
	Side A Voltage set point 0V to 1800V, 1V resolution
	Side B Current limit +/-400A, 2A resolution
	Side B Voltage set point 0V to 1800V, 1V resolution
	Power ON/OFF
Monitoring	Discharge request
	DC/DC Status
	Voltages and currents
	Internal auxiliary power supplies voltage
	Internal temperatures
Identification	Software & Hardware revision
Software Update	CAN Bootloader
Liquid cooling	
Pressure loss	<300mBar (TBC)
Maximum operating pressure*	3 barg
Maximum testing pressure	6 barg
Hydraulic connector	STAUBLI RME/CBI or CEJN UltraFlow
Mechanical	
Dimensions	666 x 423 x 86mm + connectors (TBC)
Weight	TBC
Interface	M8 fixations on each sides
Housing	Aluminum with conductive anti-corrosion treatment
Power connectors options	Busbar connections or High Voltage connectors
Signals connector	8STA family (SOURIAU)

**: for higher pressure application, please contact us*

OUTLINE DRAWING

In development

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59


www.brightloop.fr

Ordering code logic

Port examples
Individually CAN settable

Fuel Cell #1

Fuel Cell #2

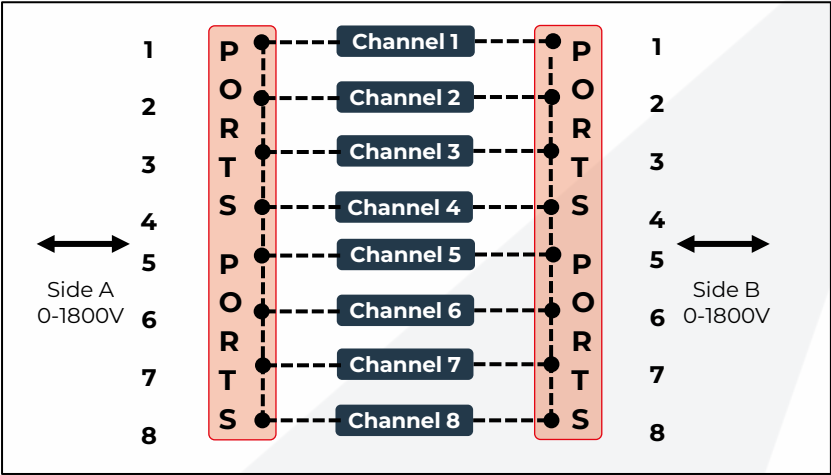

Port examples
Individually CAN settable

HV DCbus

Ultracapacitors

Trolley

DCVHV LP - 400A 50A per channel

----- Bidirectional PowerPaths
Ports configuration stage

Part number example :

DC VHV L P D S LC
┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐
1 2 3 4 5 6 7

1 – Product family		2 – Voltage	
DC	HV-HV non-isolated DCDC converter	VHV	1800V _{DC} max
3 – Package size		4 – Product line	
L	Large	P	Performance
5 – Number of ports on side A		6 – Number of ports on side B	
S	Single	S	Single
D	Dual	D	Dual
7 – Cooling option			
LC	Liquid cooling		

V22.06

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr