


DCHVI MP

HV-HV bidirectional Buck or Boost Converter
 Input-output galvanic isolation
 Voltage up to 950V_{DC}, current 480A
 Isolated port 240A / 200kW
 Multi inputs / outputs capability
 Cutting-edge power density



KEY FEATURES

- > Built-in capacitors, inductors and transformer included
- > Input and output range: 0 to 950V_{DC}
- > Non-overlapping topology: $V_{sideA} < V_{sideB}$
- > Bidirectional current capability
- > Non-isolated stage: 480A max
- > Isolated stage: 240A / 200kW max
- > Ultra-high end-to-end efficiency
- > CAN remote communication and monitoring
- > Liquid cooling
- > Weight: <25kg
- > Can be paralleled for increased power
- > Up to 8 ports possible on each side for multiple inputs-outputs configurations
- > Connectors and Busbars options for electrical interface

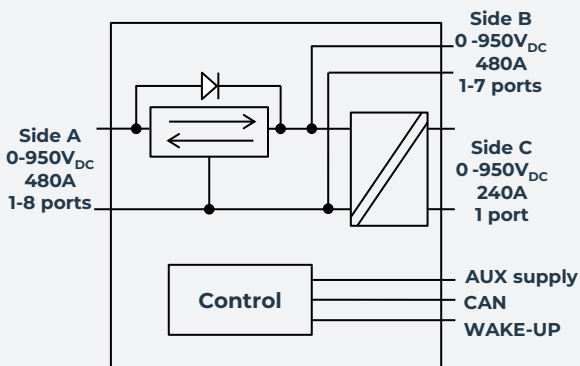

TECHNICAL SPECIFICATION

Power	
Max number of ports	8 side A, 7 side B, 1 side C
Side A, B, and C voltage range	0V _{DC} to 950V _{DC} $V_A < V_B \rightarrow V_B = V_C$
Voltage settings possibilities	Max boost ratio : $V_B = 20 \times V_A$ max
	Bypass mode : $V_A = V_B$ possible
	Short-circuit mode : $V_A = 0V_{DC}$, $V_C = 0V_{DC}$
Voltage accuracy	+/-1% of full scale
Current capability	A ↔ B : +/-60A per channel, +/-480A total A ↔ C : +/-240A
Current accuracy	<3% of full scale
Short circuit protection	Side A: Current regulation at setpoint value
	Side C: Short-circuit protected
X Capacitance	Side A: 100μF
	Side B: 140μF
	Side C: 40μF
	No inrush current limitation
Y Capacitance	<10μF
Safety discharge time	<5 sec to reach 60V
Efficiency	97.5% at full load, 1:2 voltage ratio
Control	
Auxiliary supply	9V _{DC} – 60V _{DC}
	<100μA disable mode current consumption <40W in Power_ON mode
Enable function	ON/OFF signal. Tie to ground for start-up. Internal pull up
Inrush current limitation	Not included
Environment	
Environmental protection	IP67
Altitude	Up to 4000m
Max cooling temperature	65°C outlet
Operating temperature range	From -40°C to 70°C ambient
Storage temperature range	From -40°C to 100°C

BrightLoop Converters

221 Boulevard Davout
 75020 Paris – France
 Tel +33 1 83 62 63 59

www.brightloop.fr


DCHVI MP

TECHNICAL SPECIFICATION

Dielectric withstand	
HV - case isolation	1950V _{DC} Basic isolation
HV - LV isolation	2500V _{DC} Reinforced isolation
CAN Interface	
Bus speed	125Kbps to 1Mbps (set by CAN)
Controls	Side A Current limit +/-480A, 2A resolution
	Side A Voltage set point 0V to 950V, 1V resolution
	Side B Current limit +/-480A, 2A resolution
	Side B Voltage set point 0V to 950V, 1V resolution
	Side C Current limit +/-240A, 2A resolution
Monitoring	Side C Voltage set point 0V to 950V, 1V resolution
	Power ON/OFF
	Discharge request
	DC/DC Status
	Voltages and currents
Identification	Internal auxiliary power supplies voltage
	Internal temperatures
	Internal protections
Software Update	Software & Hardware revision
	CAN Bootloader
Liquid cooling	
Pressure loss	<200mBar TBC
Maximum operating pressure*	3 barg
Maximum testing pressure	6 barg
Hydraulic connector	NORMAQUICK PS3 VDA (Mounted on NORMAQUICK PS3 NW 16-xx)
Mechanical	
Dimensions	< 600 x 280 x 80mm + connectors
Weight	<25kg
Interface	M8 fixations on each sides
Housing	Aluminum with conductive anti-corrosion treatment
Power connectors options	Amphenol PL500 & PL300 with HVIL
	Amphenol PL082 & PL084 with HVIL
	Bus bar connection
Signals connector	8STA family (SOURIAU)

*: for higher pressure application, please contact us

OUTLINE DRAWING

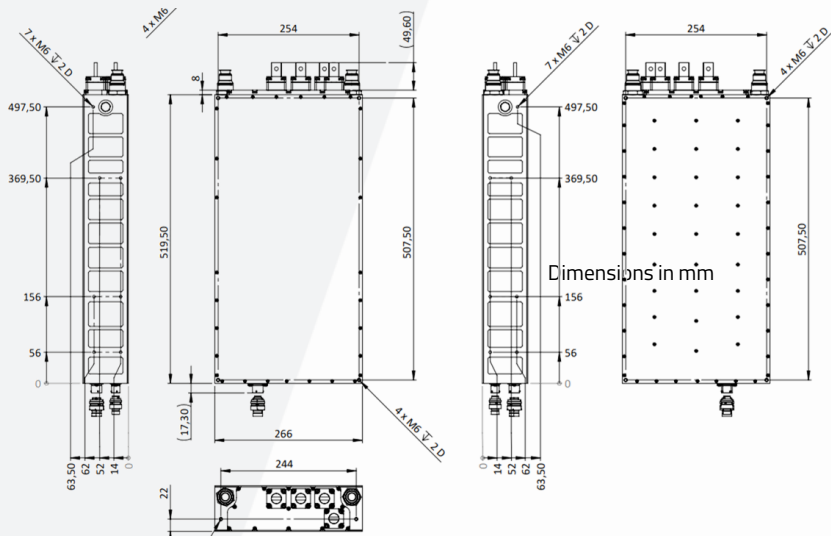

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59


www.brightloop.fr

 **BrightLoop**
A member of the ABB Group

Ordering code logic

Port examples
Individually CAN Settable

Port examples
Individually CAN Settable

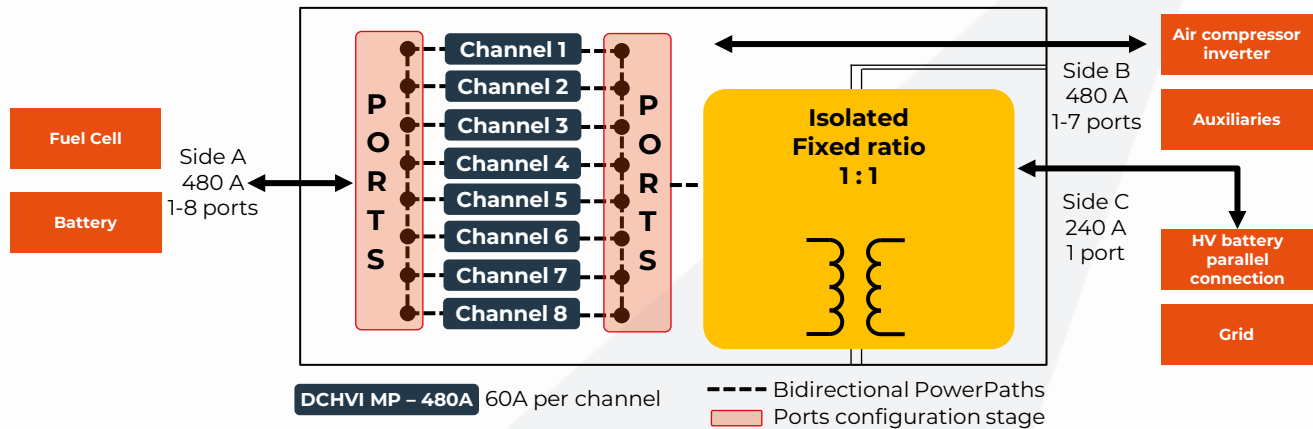

Part number example :

DC	HV	I	M	P	S	Ø	S	LC
1	2	3	4	5	6	7	8	9

1 – Product family		2 – Voltage	
DC	HV-HV isolated DCDC converter	HV	950V _{DC} max
3 – Galvanic isolation			
I	Isolated		
4 – Package size		5 – Product line	
M	Medium	P	Performance
6 – Number of ports on side A		7 – Number of ports on side B	
S	Single	Ø	None
D	Dual	S	Single
T	Triple	D	Dual
Q	Quadruple	T	Triple
P	Penta	Q	Quadruple
Sx	Six	P	Penta
H	Hepta (seven)	Sx	Six
O	Octo (eight)	H	Hepta (seven)
8 – Number of ports on side C		9 – Cooling option	
S	Single	LC	Liquid cooling

V22.06

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

 **BrightLoop**
A member of the ABB Group