


ACHV LP

Ultra-versatile bidirectional 3Ph+N inverter
 240A_{RMS} / phase
 Max power 160kW @400V_{AC}
 Perfect for grid and island configurations,
 or High Power On-board Charger



KEY FEATURES

- > Built-in capacitors & inductors
- > Non-isolated topology, to be used with LF transformers or BrightLoop's DCHVI MP for grid connection
- > DC range 0-950V_{DC}, AC range 0-400V_{AC}
- > Non-overlapping topology: $V_{DC} > \hat{V}_{ph-ph}$
- > 240A_{RMS} max phase current
- > Output power of 160kW at 400V_{AC}
- > Buck-boost configuration possible for wide DC voltage range
- > Seamless transition between grid-tied (CSI) and grid-forming (VSI) inverter and PFC rectifier
- > On-the-fly adjustment of harmonics corrections
- > PLL synchronization on external grid
- > Flexible controls allow inverter operation as independent single-phase, balanced three-phase, or unbalanced with neutral connection
- > AC compliant load sharing algorithm for easy parallelization
- > Cutting-edge power density
- > Weight: < 25kg

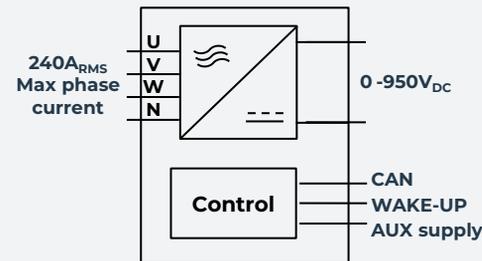

TECHNICAL SPECIFICATION

Power	
AC ports	3 phases + neutral, 400V _{AC} / 950V _{DC} max
DC port	0V _{DC} to 950V _{DC}
AC Frequency range	0-1000Hz
Power factor	> 0.95 @ 50Hz
Harmonic distortion	<1% @ 50Hz
Phase unbalance	0-100% with neutral connection
Control modes	Grid forming inverter
	Grid tied inverter
	PFC rectifier
	Active harmonics correction
Current capability	120A _{RMS} per phase
Current accuracy	<3% of full scale
Efficiency	>96% at full load
Control	
Auxiliary supply	9V _{DC} - 75V _{DC} <100µA disable mode current consumption
Enable function	ON/OFF signal. Tie to ground for start-up. Internal pull up
Parallelization	Active current sharing
Switching synchronization	Internal, between paralleled converters
	External, with a synchronization signal CAN-settable phase shift
Safety discharge	<5 sec to reach 60V
Environment	
Environmental protection	IP67
Altitude	Up to 4000m
Max cooling temperature	65°C outlet
Operating temperature range	From -40°C to 70°C ambient
Storage temperature range	From -40°C to 100°C

BrightLoop Converters

221 Boulevard Davout
 75020 Paris – France
 Tel +33 1 83 62 63 59

www.brightloop.fr


ACHV LP

TECHNICAL SPECIFICATION

Dielectric withstand	
HV - case	Basic insulation, tested at 2500V _{DC}
HVAC - HVDC	Basic insulation, tested at 2500V _{DC}
HV - LV	Reinforced insulation, tested at 5000V _{DC}
LV - case	Functional insulation, tested at 500V _{DC}
CAN Interface	
Bus speed	125Kbps to 1Mbps (set by CAN)
Controls	Current limit
	Voltage setpoint
	Frequency setpoint
	Mode of operation
	Power ON/OFF
Monitoring	Discharge request
	Status
	Voltages, currents, frequency
	Internal auxiliary power supplies voltage
	Internal temperatures
Identification	Software & Hardware revision
Software Update	CAN Bootloader
Liquid cooling	
Pressure loss	<200mBar
Maximum operating pressure*	3 barg
Maximum testing pressure	6 barg
Hydraulic connector	NORMAQUICK PS3 VDA (Mounted on NORMAQUICK PS3 NW 16-xx)
Mechanical	
Dimensions	520 x 355 x 82mm + connectors
Weight	<25 Kg
Interface	M8 fixations on each sides
Housing	Aluminum with conductive anti-corrosion treatment
Power connectors options	Amphenol PL500 & PL300 with HVIL
	Amphenol PL082 & PL084 with HVIL
	Bus bar connection
Signal connector	22 pins for control
	13 pins for paralleling and switching synchronization
	8STA family (SOURIAU)

*: for higher pressure application, please contact us

OUTLINE DRAWING

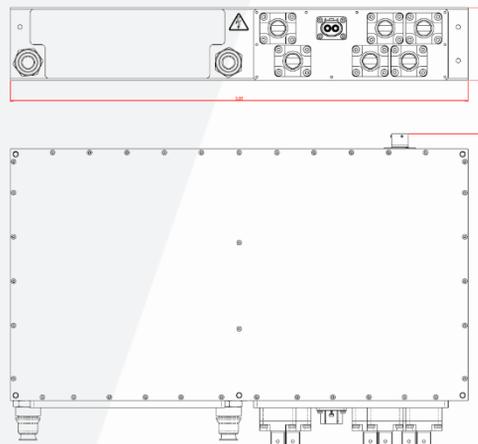


Dimensions in mm

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

Ordering code logic

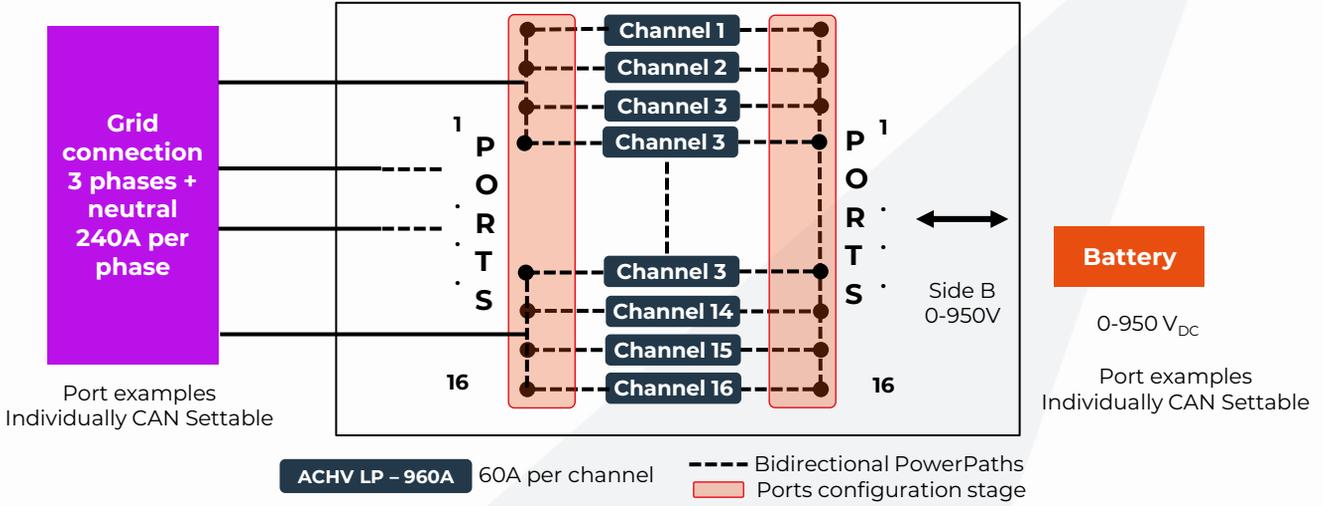

Part number example :

AC	HV	∅	L	P	S	∅	LC
1	2	3	4	5	6	7	8
1 - Product family				2 - Voltage			
AC	HV-HV isolated ACDC conv. inv.			HV	400V _{AC} / 950V _{DC} max		
3 - Galvanic isolation							
∅	Isolated						
4 - Package size				5 - Product line			
M	Medium			P	Performance		
6 - Number of ports on side A				7 - Number of ports on side B			
S	Single			S	Single		
D	Dual			D	Dual		
T	Triple			T	Triple		
Q	Quadruple			Q	Quadruple		
P	Penta			P	Penta		
Sx	Six			Sx	Six		
H	Hepta (seven)			H	Hepta (seven)		
O	Octo (eight)			O	Octo (eight)		
8 - Cooling							
LC	Liquid cooling						

V26.02

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

