



# DCHV MP

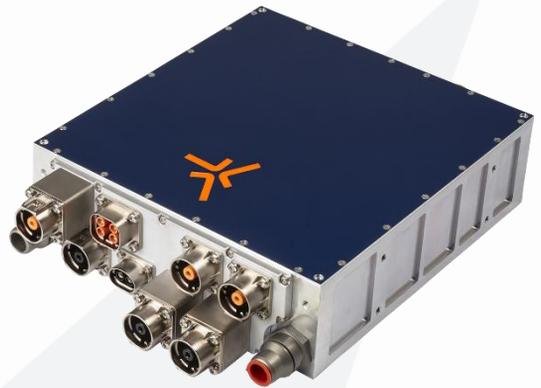

HV-HV bidirectional Buck or Boost Converter  
 Voltage up to 950V<sub>DC</sub>, current 480A  
 Power 250kW at 500V<sub>DC</sub> Side A  
 Multi inputs / outputs capability  
 Cutting-edge power density

## KEY FEATURES

- > Built-in capacitors & inductors
- > Input and output range: 0 to 950V<sub>DC</sub>
- > Non-overlapping topology:  $V_{sideB} > V_{sideA}$
- > Bidirectional current capability
- > Max current: 480A
- > Current and voltage control
- > CAN remote communication and monitoring
- > Weight: <12kg
- > Can be paralleled for increased power
- > Buck-boost option available for overlapping input-output voltage
- > Up to 8 ports possible for multiple inputs-outputs configurations
- > Connectors and Busbars options for electrical interface

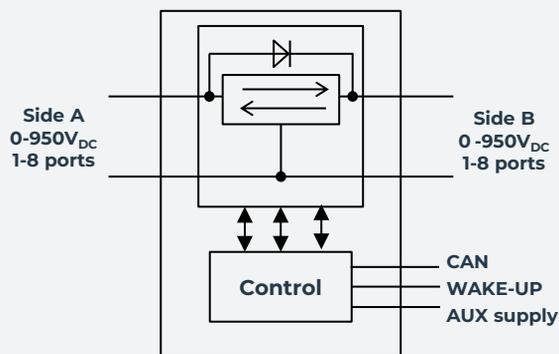

## TECHNICAL SPECIFICATION

<b>Power</b>	
Max number of ports	8 side A, 8 side B
Side A and side B voltage range	0V <sub>DC</sub> to 950V <sub>DC</sub>
Voltage settings possibilities	Max boost ratio: $V_B = 20 \times V_A$ max
	Bypass mode: $V_A = V_B$ possible
	Short-circuit mode: $V_A = 0V_{DC}$
Voltage accuracy	+/-1% of full scale
Current capability	+/-60A per channel, +/-480A total
Current accuracy	<3% of full scale
Efficiency	98.9% at nominal current
	with 2:1 voltage conversion ratio
	Current regulation at set point value down to
Short circuit protection	0V <sub>DC</sub> (in case the side A is regulated in voltage mode)
X Capacitance	100µF per side A & B
	No inrush current limitation
Y Capacitance	1µF
Safety discharge time	<5 sec to reach 60V
<b>Control</b>	
Auxiliary supply	9V <sub>DC</sub> – 60V <sub>DC</sub>
	<100µA disable mode current consumption
	<40W in Power_ON mode
Enable function	ON/OFF signal. Tie to ground for start-up.
	Internal pull up
Inrush current limitation	Not included
<b>Environment</b>	
Environmental protection	IP67
Altitude	Up to 4000m
Max cooling temperature	65°C outlet
Operating temperature range	From -40°C to 70°C ambient
Storage temperature range	From -40°C to 100°C
<b>Dielectric withstand</b>	
HV - case isolation	1950V <sub>DC</sub> Basic isolation
HV - LV isolation	2500V <sub>DC</sub> Reinforced isolation

### BrightLoop Converters

221 Boulevard Davout  
 75020 Paris – France  
 Tel +33 1 83 62 63 59

[www.brightloop.fr](http://www.brightloop.fr)


# DCHV MP

TECHNICAL SPECIFICATION

<b>CAN interface</b>	
Bus speed	125Kbps to 1Mbps (set by CAN)
Controls	Side A Current limit +/-480A , 2A resolution
	Side A Voltage set point 0V to 950V, 1V resolution
	Side B Current limit +/-480A, 2A resolution
	Side B Voltage set point 0V to 950V, 1V resolution
Monitoring	Power ON/OFF
	Discharge request
	DC/DC Status
	Voltages and currents
	Internal auxiliary power supplies voltage
Identification	Internal temperatures
	Internal protections
Software Update	Software & Hardware revision
	CAN Bootloader
<b>Liquid cooling</b>	
Pressure loss	<200mBar
Maximum operating pressure*	3 barg
Maximum testing pressure	6 barg
Hydraulic connector	NORMAQUICK PS3 VDA (Mounted on NORMAQUICK PS3 NW 16-xx)
<b>Mechanical</b>	
Dimensions	260 x 280 x 80mm + connectors
Weight	<12kg
Interface	M8 fixations on each sides
Housing	Aluminum with conductive anti-corrosion treatment
Power connectors options	Amphenol PL500 with HVIL
	Amphenol PL300 with HVIL
	Amphenol PL084 & PL082 with HVIL
Signals connector	Bus bar connection
	8STA family (SOURIAU)

\*: for higher pressure application, please contact us

## OUTLINE DRAWING

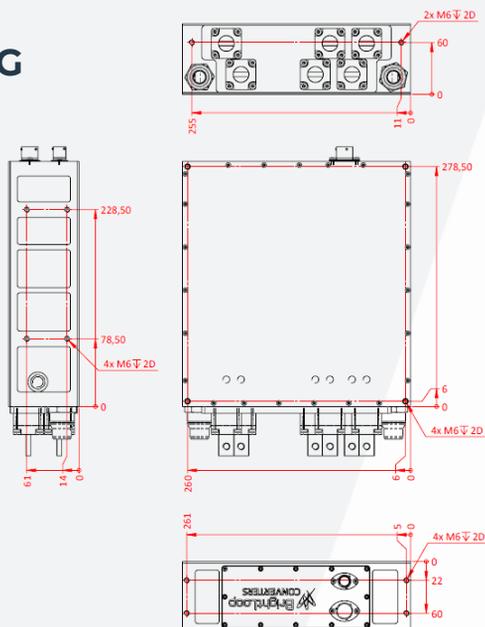

Dimensions in mm

### BrightLoop Converters

221 Boulevard Davout  
75020 Paris – France  
Tel +33 1 83 62 63 59


[www.brightloop.fr](http://www.brightloop.fr)

 **BrightLoop**  
A member of the ABB Group

# Ordering code logic

Port examples  
Individually CAN settable

- Fuel Cell #1
- Fuel Cell #2
- Compressor inverter
- 400V<sub>DC</sub> auxiliaries

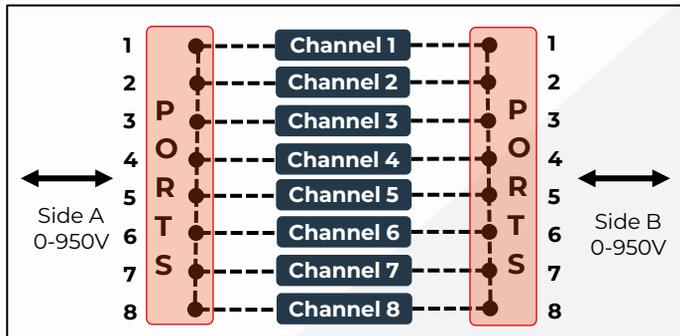

Port examples  
Individually CAN settable

- HV battery
- Ultracapacitors
- Trolley

**DCHV MP - 480A** 60A per channel

--- Bidirectional PowerPaths  
 Ports configuration stage

## Part number example:



1 - Product family		2 - Voltage	
DC	HV-HV non-isolated DCDC converter	HV	950V <sub>DC</sub> max
3 - Package size		4 - Product line	
M	Medium	P	Performance
5 - Number of ports on side A		6 - Number of ports on side B	
S	Single	S	Single
D	Dual	D	Dual
T	Triple	T	Triple
Q	Quadruple	Q	Quadruple
P	Penta	P	Penta
Sx	Six	Sx	Six
H	Hepta (seven)	H	Hepta (seven)
O	Octo (eight)	O	Octo (eight)
7 - Cooling			
LC	Liquid cooling		

V26.02

## BrightLoop Converters

221 Boulevard Davout  
75020 Paris - France  
Tel +33 1 83 62 63 59

[www.brightloop.fr](http://www.brightloop.fr)