


DCDC LO

Bidirectional isolated DCDC converter
Design for series production
800V battery compliant
Battery charger / LV network supply
Total continuous power 12kW/700A



KEY FEATURES


- > **Wide HV range: 200 to 1100*V_{DC}**
- > **Wide LV range: 0 to 80V_{DC} (CLASS B1 ISO6469-3)**
- > **Single or Dual LV ports configuration**
- > **CAN Bootloader & Remote Communication**
- > **Liquid-Cooling (LC)**
- > **HV bus pre-charge**
- > **Best-in-class power density**
- > **Weight: <5kg**

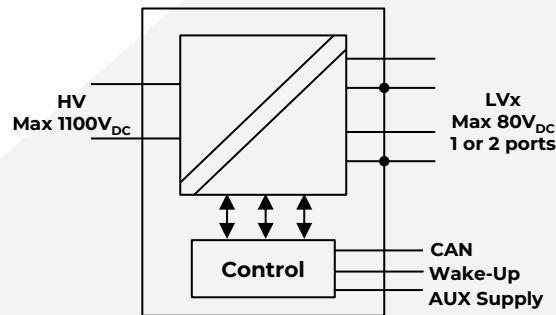

TECHNICAL SPECIFICATION

HV side	
Voltage setpoint	Up to 1100*V _{DC} (set by CAN)
LV side	
LV ports configuration	Single or Dual
Voltage setpoint	Up to 75V _{DC} (set by CAN)
Static precision	1%
Current limit	0 to 700A (set by CAN)
Current limit accuracy	<3%
Short circuit protection	Current regulation at setpoint value down to 0V
Continuous power	12000W
Line + load regulation	10% for 0-100% step load (without battery)
Efficiency	
Global efficiency	> 96%
Environment	
Environmental protection	IP68 IP6K9K
Altitude	Up to 3000m (10000ft)
Cooling	Liquid temperature 60°C max (inlet)
Operating temperature range	From -40°C to 80°C ambient
Storage temperature range	From -40°C to 100°C
Weight	TBC

*For higher voltage, please refer to BrightLoop

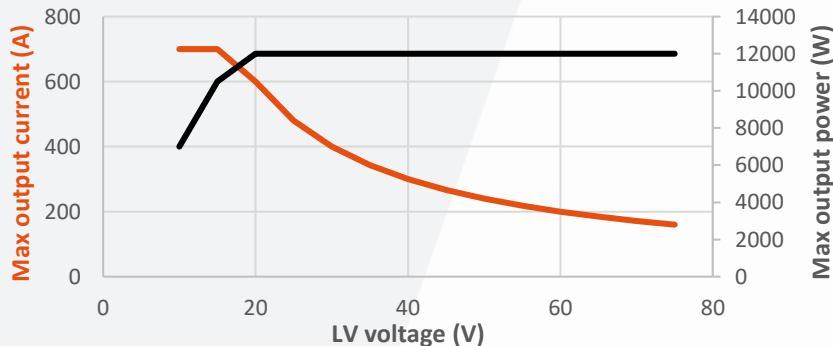

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

DCDC LO

TECHNICAL SPECIFICATION

CAN Interface

Bus speed	125Kbps to 1Mbps (set by CAN)
Conversion modes	HV -> LV
	LV -> HV
	LV <-> LV (in dual LV configuration)
Controls	LV current limit (1A resolution)
	HV current limit (0.1A resolution)
	LV voltage setpoint (0.015V resolution)
	HV voltage setpoint (1V resolution)
Monitoring	Power ON/OFF for each LV port
	DC/DC Status and errors
	Voltages, currents, temperatures measurements
Identification	Software & Hardware revision
	Bootloader for CAN software update



Conformity & approval

HV/LV insulation	3000V _{DC} Reinforced isolation
Safety	EN 62368-1
	ECE R100
	ISO26262 (ASIL B)
Approvals	ECE R10
	LV124

Mechanical

Dimensions	316x210.8x50.3mm (TBC)
Housing	Aluminum with conductive anti-corrosion treatment
HV connector	Amphenol PL082X-61-6 (with security loop)
LV connectors	Amphenol SurLok Plus 10mm
Signals connector	Souriau UTS 6JC 12E 14S
Cooling Connector	12mm nominal diameter (customizable)

OUTLINE DRAWING

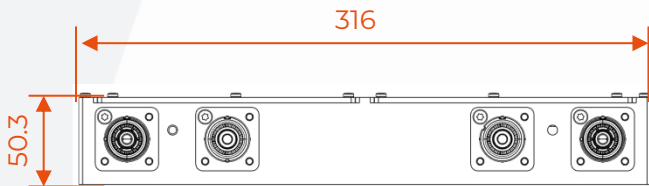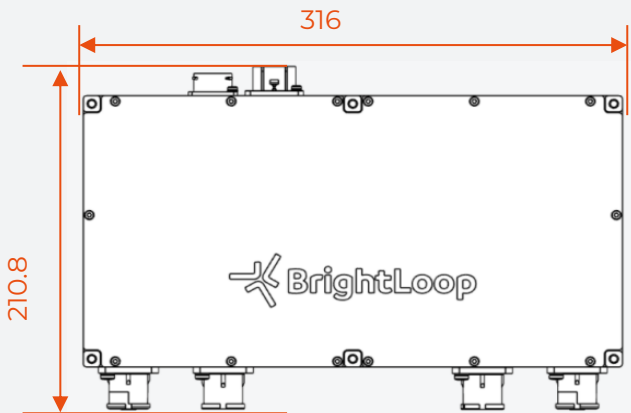

Dimensions in mm


BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

 **BrightLoop**
A member of the ABB Group

Ordering code logic

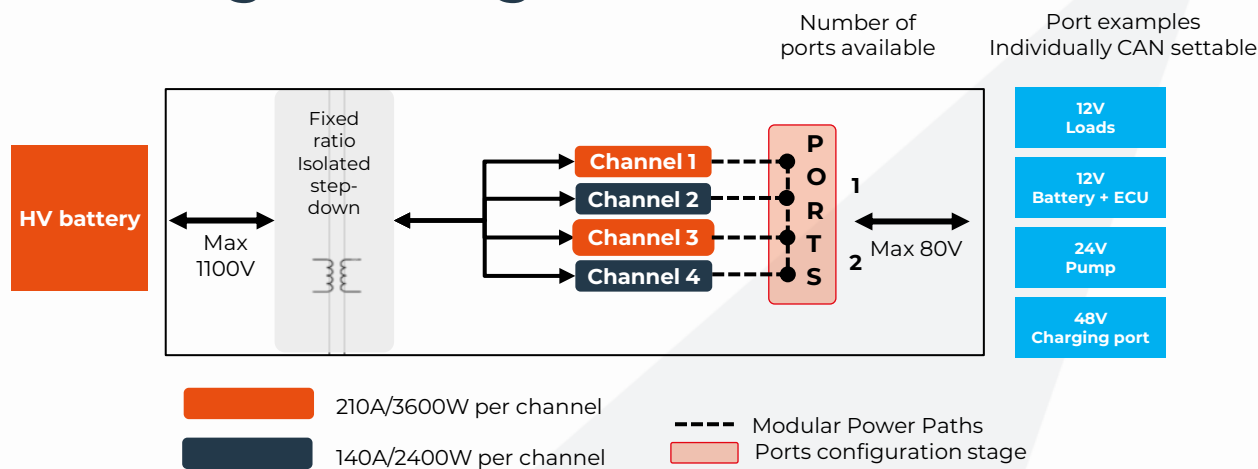

1 – Product family		2 – Package size	
DCDC	Isolated DCDC converter	L	Large
3 – Product line		4 – Number of ports on LV side	
O	Optimum	S	Single
		D	Dual
5 – Number of channels per PowerPath		6 – Cooling option	
See table below		LC	Liquid-Cooling

Configuration name	Number of ports	Channels connected to LV1	Channels connected to LV2	LV1 capacity	LV2 capacity
0	S	1 & 2	3 & 4	350A/6000W	350A/6000W
1	D	1 & 2	3 & 4	350A/6000W	350A/6000W
2	D	1, 2 & 3	4	380*A/9600W	140A/2400W
3	D	1	2,3 & 4	210A/3600W	380*A/8400W

*For higher current requirements, please contact us.

V26.06

BrightLoop Converters

221 Boulevard Davout
75020 Paris – France
Tel +33 1 83 62 63 59

www.brightloop.fr

